



TYPE NBST

Features

- Connects a 2/0-14 conductor to a neutral bar
- Seamless stabs
- Conductor entry at 90° or parallel to neutral bar
- Mounts to solar nodes and neutral bars with hole spacing from .300" to .350"
- Hex socket screw included
- Manufactured from high strength aluminum
- Electro-tin plated
- UL 486 A/B and UL 467 Recognized, 90° C

Benefits

- Enables connection of a larger conductor for application versatility
- Provide dual current path for reliability and cool operation
- Multiple conductor orientation
- For diverse field applications
- Offers higher torque rating for reliability
- Suitable for use with copper or aluminum conductors
- Provides low contact resistance
- For power and grounding applications

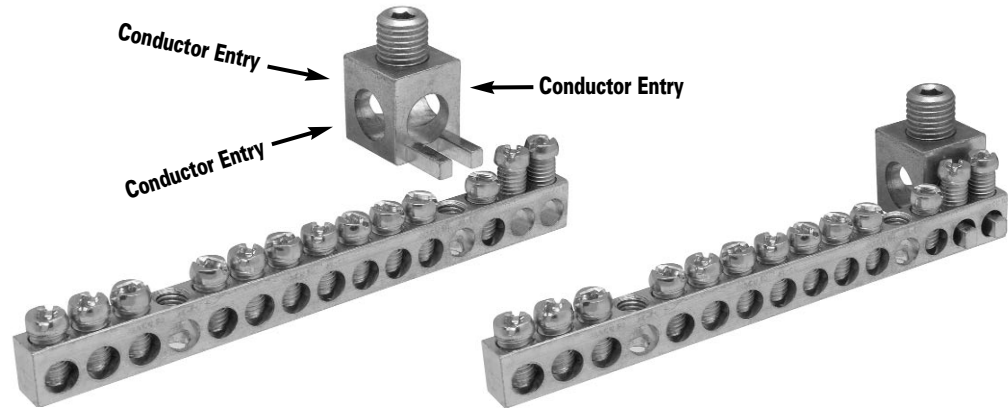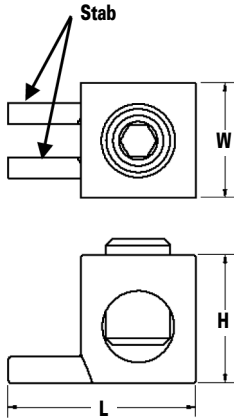

Catalog Number	Wire Range	Dimensions - in. (mm)			Hex Size
		L	W	H	
NBST-2/0	2/0-14	1.140 (29.0)	0.700 (17.8)	0.780 (19.8)	3/16

UL Recognized for use with ILSCO

Neutral Bars	Solar Nodes
NB-350	SCNL
NBAS	SCNM

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)
DE-OX oxide inhibitor is recommended for all aluminum terminations